



Feature -

rating: 1.7A, 13VDC,
SPDT or DPDT, lock / non-lock function


Application -

automotive
consumer products
computer products
instrumentation
communication equipments

► **SPECIFICATIONS**

SWITCH SPECIFICATIONS	
POLE - POSITION	1P2T or 2P2T , Lock type are Available
CONTACT RATING	13 V DC , 1.7 A or 125 V AC , 3 A
CONTACT RESISTANCE	50 mΩ MAX. 1.5 V DC ; 100 mA , by method of voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not allowable ; 500 V AC for 1 minute
OPERATING FORCE	400 ± 200 gf
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-20°C ~ 70°C
TOTAL TRAVEL	3.5 ± 0.3 mm

► **HOW TO ORDER**

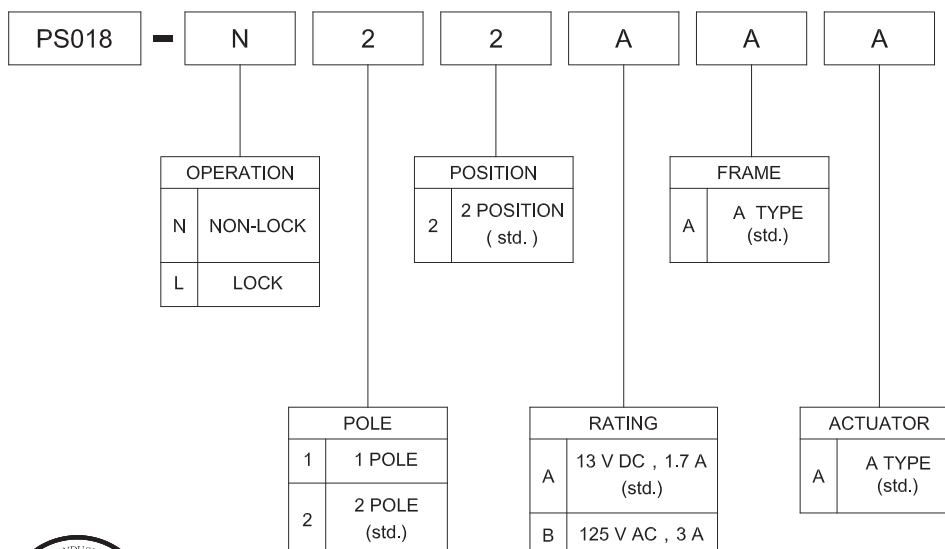


PS018 SERIES

PUSH BUTTON SWITCH

► DIMENSION


PS018-N22AAA

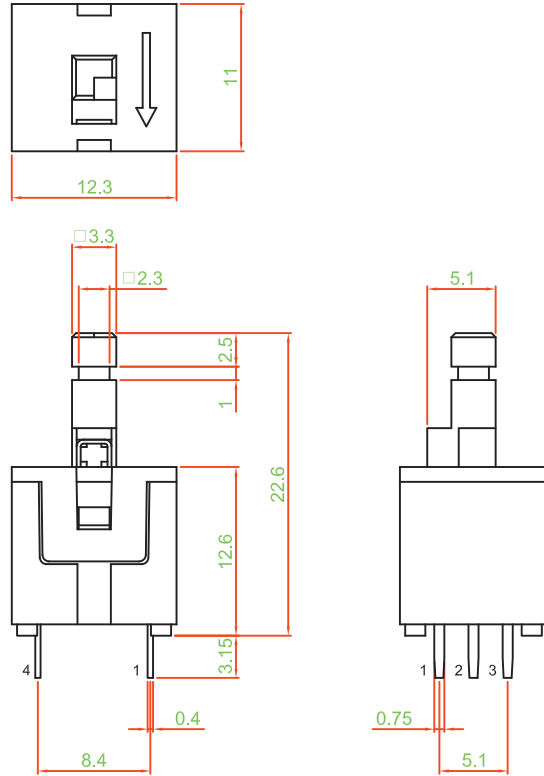

► MATERIAL

- ACTUATOR : PA + GF
- TERMINAL : BRONZE SILVER PLATING
- FRAME : PA + GF
- SPRING : STAINLESS STEEL

► P.C.B LAYOUT



► UNIT WEIGHT

- PS018-N22AAA : 2.1 ± 0.05 g / pc

► SCHEMATIC

